

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	60578-0154
First Inventor or Application Identifier	Ditch et al.
Title	Tie Down For Wheelchairs
Express Mail Label No.	

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
- ☒ Specification [Total Pages 16]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 7]
- Oath or Declaration [Total Pages 23]
  - ☐ Newly executed (original or copy)
  - ☒ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - ☐ Computer Readable Copy
  - ☐ Paper Copy (identical to computer copy)
  - ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney  
(when there is an assignee)
- ☐ English Translation Document (if applicable)
- ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☒ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- ☐ \* Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired  
(PTO/SB/09-12)
- ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
- ☐ Other: copy of Assignments from prior application

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No: 08 / 905.532  
Prior application information: Examiner Gordon Group / Art Unit:

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.


## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	Conrad J. Clark				
	Dickinson Wright PLLC				
Address	1901 L Street, NW				
	Suite 800				
City	Washington	State	DC	Zip Code	20036
Country	USA	Telephone	202-457-0160	Fax	202-659-1559

Name (Print/Type)	Conrad J. Clark	Registration No. (Attorney/Agent)	30,340
Signature		Date	01/27/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: Application of

DITCH et al.

Serial No.: Div. of 08/905,352

Examiner:

Art Unit: Not yet assigned

Filed: January 27, 1999

For: TIE DOWN FOR WHEELCHAIRS

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents  
and Trademarks  
Washington DC 20231

Sir:

Prior to the first office action, please amend the above identified application as follows:

In the specification:

Page 1, after the title, insert the following new paragraph:

CROSS REFERENCE TO RELATED APPLICATIONS

-This application is a division of United States Application serial  
number 08/905,352, which was filed on August 4, 1997.-

In the claims:

1. (Amended) In combination, a vehicle having  
a floor for supporting passengers,

a side wall extending upward from said floor,

a passenger seat adjacent said side wall, and

means for securing a wheelchair to said vehicle,

wherein said passenger seat is foldable from a seating position occupying an area above said floor to a folded position that allows said wheelchair to be positioned in said area, and

said means for securing a wheelchair is [fixed] permanently attached to said vehicle and comprises a plurality of means for engaging said wheelchair, wherein each of said plurality of means for engaging said wheelchair is locked to a respective location in said area with two of said means for engaging being adjacent said side wall, and said means for securing further comprises a movable element [and is] movable between an operative position extending to a further location in [into] said area spaced from said side wall [for receiving said wheel chair] and a second position [remote from] closer to said side wall than said further location [area], and wherein said movable element comprises a further means for engaging said wheelchair and means for locking said movable element in said operative position such that said further means is locked at said further location for cooperating with said plurality of means for engaging to secure said wheelchair to said vehicle.

2. (Amended) A combination according to claim 1 wherein said [means for securing] movable element is pivotally mounted to said vehicle for movement between said operative and second positions.

3. (Amended) A combination according to claim 2 wherein said [means for securing] movable element comprises an elongate bar having a pivotal connection at an end adjacent said side wall [and latch means for holding said securing element in said operative position when said latch is engaged and for allowing said securing element to be moved to said second position when said latch means is disengaged].

6. (Amended) A combination according to claim 1 [further comprising second means for securing a wheel chair to a vehicle, wherein said second means for securing is spaced from said means for securing and comprises means for engaging a said wheelchair, whereby] wherein said means for engaging on said [means for securing are] movable element is adapted to engage one end of [a] said wheelchair and one of said plurality of means for engaging [on said second means for securing are] is adapted to engage an opposite end of said wheelchair.

23 (Amended) Apparatus for securing a wheelchair to a vehicle comprising

a bar,

an adjustable strap secured to said bar and adapted to extend from said bar for engaging said wheelchair and securing said wheelchair to said vehicle, and

means for permanently mounting said bar to [a] said vehicle such that said bar may be moved with respect to said vehicle between an operative position where said strap is locked to said vehicle at a predetermined location with respect to said vehicle [can be attached to] for engaging said wheelchair under tension and a storage position where said strap is remote from said [wheelchair] predetermined location.

25. (Amended) A method for attaching a wheelchair to a vehicle comprising:

providing said vehicle with an area for receiving said wheelchair,

providing said vehicle with means for securing said wheelchair in said area to said vehicle, wherein said means for securing comprises a plurality of adjustable straps for engaging said wheelchair locked [is fixed] to said vehicle at predetermined spaced locations and [comprises] a movable element having [means] a further adjustable strap thereon for engaging a portion of said wheelchair in said area, said movable element being movable with respect to said vehicle between an operating position wherein said [means for engaging] further strap is [located] locked relative to said area to allow said [means for engaging] further strap to be attached to said portion of said wheelchair and a storage position wherein said [means for engaging] further strap is located relative to said area to be remote from said portion of said wheelchair,

placing said wheelchair in said area,

moving said movable element from said storage position to said operating position, and

attaching said means for securing to said wheelchair.

Cancel claims 7 through 22, and add the following new claims

26 (New) A system for securing a wheelchair to a vehicle comprising:

four straps, each of which has means for engaging the frame of said wheelchair,

and

wherein said second housing is permanently attached to said bar for movement therewith between said operative position and said storage position.

#### REMARKS

The above amendments are made to cancel claims allowed in the parent application and to define the invention more clearly. Entry is respectfully solicited.

Please charge any fee deficiency or credit any fee excess to deposit account no. 04-1061.

Respectfully Submitted,



Conrad J. Clark  
Reg. No. 30,340

DICKINSON, WRIGHT PLLC  
1901 L Street N.W.  
Washington, D.C. 20036  
202-457-0160  
202-659-1559 (fax)  
Date: January 27, 1999  
Docket No. 60578-0154

## TIE-DOWN FOR WHEELCHAIRS

5

### TECHNICAL FIELD

This invention relates to the art of apparatus for securing a wheelchair to a vehicle. The invention is particularly useful for securing one or more wheelchairs to a bus.

### BACKGROUND

10 Persons using wheelchairs often wish to ride in a vehicle such as a bus, train, or airplane while remaining in the wheelchair. In these instances, the wheelchair must be secured to the vehicle to ensure the safety of the passenger. When the vehicle is a public bus, an additional concern is the ease by which the operator can secure and release the wheelchair so that a minimum of time is spent in this activity. Further, it is  
15 often necessary to provide a vehicle with a plurality of tie-down stations whereby a plurality of passengers in wheelchairs can be accommodated simultaneously.

Prior wheelchair tie-downs are awkward in use. For example, one such tie-down comprises a number of receptacles in the floor of a transit vehicle and an equal number of straps, each with a hook at one end for engaging the frame of the wheelchair and a  
20 lug at the opposite end for engaging one of the receptacles. This system is very difficult in use because it requires the operator first to locate the straps and then to attach the straps to the chair and the floor and adjust their lengths, which requires reaching, bending, and the like. Moreover, the straps are often not available, having been lost between uses because they are not attached to the bus when not in use, and when  
25 found, they are usually dirty from contact with the floor or storage in a box with other items. Securing the straps to the floor during periods of non-use is not feasible because their presence would restrict movement of the wheelchair into or out of the station and would present a hazard, possibly tripping others walking in the bus.

Further, the heel of a high-heeled shoe is easily caught in the receptacles themselves, resulting in personal injury, property damage, and delay.

### SUMMARY OF THE INVENTION

5 In accordance with the invention a strong, safe, and easily applied tie-down for wheelchairs is provided. The tie-down finds particular utility in a public bus, where the safe and efficient ingress and egress of wheelchair passengers is very important to ensure safety and reduce delays for all passengers. Moreover, the tie-down of the invention does not require dedicated floor space, thus allowing other passengers to use the same floor space when wheelchair passengers are not present.

10 In the preferred embodiment, the tie-down of the invention is located in a bus adjacent chairs that fold against the side of the bus to expose the floor space beneath the chairs. Two wheelchairs are preferably arranged in this space with both of them facing forward, either on respective sides of the vehicle or in tandem.

15 A first securing element is fixed to the bus at one end of the space to be occupied by a wheelchair, and a second securing element is movably attached to the other end of the space to be occupied by that wheelchair. The second securing element is preferably pivotally attached to the bus for movement horizontally, whereby it may be placed in an unobtrusive storage position adjacent the side of the bus and moved to an operative, securing position, extending perpendicularly from the side of the bus when required. Each of the first and second securing elements carries straps with hooks for engaging the structure of the wheelchair to hold it to the securing elements. The straps are preferably carried by winches that can be operated easily and quickly to release or retract the straps whereby they may be attached and tightened, or released and detached easily.

20 When the space is to be occupied by more than one wheelchair, a third securing element is fixed to the bus at the opposite end of the wheelchair space, such that the movable securing element, when in its operational position, is midway between front



and rear securing elements. In the preferred embodiment, the rearmost securing element is fixed and the central and front securing elements are pivotal.

5 The movable securing element includes means for holding it in the storage and operational positions. The particular means may be any of several designs, but the preferred design for holding this element in the operational position is a vertically-  
movable pin carried by the movable element for engaging an aperture in a floor plate when the securing element is in the operational position. This pin includes a handle at its upper end for easy grasping by the operator to push the pin into the recess when a wheelchair is being secured and to pull it from the recess to move the securing element  
10 to the storage position. The pin is preferably a "Ball-lok" pin that includes retractable retaining balls near the end of the pin. These balls are controlled by a central shaft that is axially movable. The shaft is spring-biased to a position where the balls are in the locking position, and the shaft can be moved by pressing on one end to a position where the balls move inward to release the pin from the floor plate. Thus, when the pin  
15 is placed in an aperture in the floor plate, the balls will protrude from the sides of the pin to engage the aperture and prevent removal of the pin. The operator can remove the pin from the floor plate by depressing the button formed by the end of the shaft and lifting the pin from engagement with the floor plate.

20 Other means may be used for securing the movable element. For example, the latch for retaining the movable element in the storage position may be located near the pivot axis. Thus, the end of the movable element near the wall could be provided with an element, such as a disk with apertures for cooperating with a removable pin for holding the disk and the movable securing element in any of several predetermined positions, including the operational and storage positions.

25 It will be appreciated that the movable securing element may be mounted for movement in other than a horizontal plane. For example, this element may be mounted for movement vertically in those situations where passengers not in wheelchairs will not be bothered by the presence of the movable element in the storage position. Also, the movable element could be made such that it telescopes outwardly from the side wall of

the bus. In this arrangement, storage would be in a collapsed configuration, and operation would be from an expanded configuration. As well, the vertically movable element could be telescoping whereby the stored position would not interfere with other passengers.

5 In operation, a wheelchair passenger approaches the space having the tie-down such that one end of the wheelchair is adjacent one of the front or rear securing elements. If the entire space is unoccupied, this is very easy because the movable element will be in its storage position. If the space is already occupied by a first wheelchair, it may be necessary for the bus operator to move the movable element  
10 slightly to facilitate entry of the second wheelchair. In either situation, the wheelchair is positioned in the wheelchair area with one end of the wheelchair adjacent one set of securing elements located at opposite ends of the area, and the central movable element is moved into position adjacent the other end of the wheelchair. The operator presses the pin into the recess to secure the movable element, and the straps are  
15 attached to the frame of the wheelchair. In the preferred embodiment, there are four straps with hooks or looped belts that engage the frame. The straps are carried by winches, which are turned by the operator to tighten the straps. When a wheelchair passenger desires to exit the bus, the operator releases the straps by actuating release buttons on the winches, removes the hooks from the wheelchair, and, if necessary,  
20 moves the movable element to allow the passenger to exit the bus.

An advantage of the movable element is that it may be moved to provide aisle clearance when required.

The above description has focused on operation with regard to a wheelchair having a tubular frame. The invention may be used equally well for other types of  
25 vehicles, such as electric powered vehicles with non-tubular frames, such as "scooters." Securing such a vehicle merely requires that straps be located on the fixed and movable elements with engaging elements designed for the frame of this type of vehicle. In this connection it is noted that the term "wheelchair" as used herein refers generally to any type of personal vehicle.

It is an object of this invention to provide a tie-down for a wheelchair that provides passenger safety and is easy to operate, resulting in significantly reduced time required by the vehicle operator.

Another object of this invention is to provide a tie-down for a wheelchair that makes economical use of the available space on a vehicle.

Yet another object of this invention is to provide a unique method for securing wheelchairs to a vehicle.

Still another object of the invention is to provide a tie-down for a wheelchair that retains the securing straps in safe, permanent location that is isolated from debris normally found in high-use vehicles, whereby the straps are maintained in better condition readily available for use.

These and other objects will be apparent from the following detailed description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side elevation view of a tie-down in accordance with the invention.

Figure 2 is a top plan view of a tie-down in accordance with the invention installed on a bus.

Figure 3 is a perspective of a movable element used in the embodiment shown in figures 1 and 2.

Figure 4 is a perspective of a second movable element used in the embodiment shown in figures 1 and 2.

Figure 5 is a top plan view of the floor plate.

Figure 6 is an exploded view of the floor plate of figure 4 and partially in cross section.

Figure 7 is a perspective of another embodiment of a movable element.

Figures 8a and 8b are perspectives of a further embodiment of a movable element.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figures 1 and 2 illustrate a tie-down in accordance with a preferred embodiment of the invention installed in a bus. The tie-down shown in these figures is arranged to accommodate two wheelchairs in a wheelchair securing area and comprises a central  
 5 movable securing element 2 located between the wheelchairs, a fixed securing element 4 at the rear of the area, and a second movable securing element 5 at the front of the area. The wheelchair securing area may also be occupied by side-facing seats 6, which are shown in their folded-up positions. Thus, the space occupied by the tie-down to be described is used by passengers in seats such as 6 when not occupied by  
 10 passengers in wheelchairs and seats 6 are folded down.

The movable securing element 2 is mounted for pivotal movement to and from the operational position, shown in solid lines in figure 1, where it extends  
 15 perpendicularly from the side wall 8 of the bus. When not in use, the movable securing element 2 may be moved to a storage position, which is shown in phantom lines. As well, element 5 is constructed similarly to that of the movable element 2 and may be moved to a storage position, also shown in phantom lines, when not in use.

The end of the movable securing element nearer the side wall of the bus is pivotally connected to the bus. With reference also to figure 3, the connection is provided by a bracket 10, which is bolted to the side wall of the bus at flanges 12. The  
 20 lower part of the bracket includes a U-shaped pivot bracket 14, which receives a pivot pin 16. The pin 16, in turn, engages a second U-shaped bracket 17 in the end of the movable element 2 to provide pivotal movement of the element 2 about the pin.

A releasable locking mechanism is provided on the movable securing element remote from the pivot pin 16. In the preferred embodiment, the locking element  
 25 includes a vertically-movable locking pin 18 and a floor plate 20 with a recess therein, which will be more fully described below with respect to figures 5 and 6. The recess in the floor plate receives the pin 18 to secure the movable element 2 in the operational position when the pin is moved downward. The upper end of the pin 18 has a handle 22 for facilitating upward movement of the pin by the operator to disengage the pin from

the recess, whereby the movable element 2 may be pivoted forward or rearward. The pin 18 is preferably of the type sold under the trademark "Bal-lok," which has locking balls at one end that are controlled by a spring-loaded, central shaft. The upper end of the shaft forms a button 23 for allowing the operator to depress the shaft and release  
 5 the balls by pressing on the button. When the balls are held outward by the shaft, the pin 18 will be secured in the recess, and depression of the button will release the pin.

Each of the fixed and movable securing elements includes at least two adjustable straps 24, each of which has a hook 26 for engaging the frame of a wheelchair. Each strap is contained in a housing 28, which is attached to the securing  
 10 element at desired locations. The housings may provide a hand-operated winch for allowing the operator to tighten the strap after the hook is applied to the frame of the wheelchair by rotation of the winch. Preferably, the housings carrying straps for the front of the wheelchair include winches, while those for engaging the rear of the chair do not require that structure. The housings include quick-release features as are  
 15 known in the art to allow the straps to be released easily for unrolling the straps, disengaging the hooks, and freeing the wheelchair. The housings 28 are preferably arranged in spaced pairs for engaging the left and right sides of the front and rear of the wheelchairs at angles that will be the most effective. Such angles have been determined and are generally known to those of skill in the art.

20 With reference to figures 1 and 2, the passenger seat belts 25 are also provided, which are carried in housings 29. Generally, the desirable arrangement is for the passenger lap belt housings 29 to be spaced more widely than that of housings 28 for the rear wheelchair-restraining belts. Thus, in the configuration shown in the figures, where the wheelchairs are both facing forward, the housings 29 having lap belts for the  
 25 front passenger are more widely spaced than are the housings 28 that contain wheelchair restraining belts for the rear of the front wheelchair. In the embodiment shown, one of the housings 29 is placed on an outboard end of the movable element 2, and the other is placed on the mounting bracket 10, for example, at threaded opening 11. The housings 28 for the wheelchair restraining belts for the fronts of the

wheelchairs are spaced more widely than are the housings for the rear of a wheelchair and are preferably spaced at the same distance as are the housings for the passenger restraining belts. Clearly, other arrangements may be useful for other situations.

The housings 28 and 29 are preferably mounted to the movable securing  
 5 element 2 and 5 by respective mounting brackets 30 and 32. These brackets are  
secured to the movable elements, as by welding, and include mounting holes for  
 receiving mounting bolts (not shown) that extend through the bracket and engage  
 threaded openings in the belt housings. The mounting brackets preferably mount the  
 housings on top of the movable element, as shown, to provide ready access for the  
 10 operator and to reduce the likelihood they will become contaminated with dirt, water,  
 and the like from the floor of the vehicle. The housings are preferably mounted with  
 washers that allow the housings to pivot and align automatically with the angle of the  
tension placed on the belts themselves.

As noted, the movable elements 2 and 5 may be moved to non-operational  
 15 positions when there are no wheelchair passengers and the chairs 6 are in use. The  
 elements are retained in the non-operational positions, shown in phantom lines in  
 figures 3 and 4, by second floor plates 21, which are the same as floor plates 20.

The fixed securing element 4 is a rigid, L-shaped element bolted to the side wall  
 and floor of the vehicle in known manner and may include a partition as illustrated.

20 Figure 4 is a perspective of front movable element 5. This element includes  
 mounting brackets 32, which mount only two housings 28 for securing the front of the  
 wheelchair of the front passenger. Also, the bracket 10 shown in figure 4 is of an  
 optional configuration wherein one flange 12 attaches to the side wall of the vehicle,  
 and the other flange attaches to the floor of the vehicle. That configuration may be  
 25 used for the central securing element, as well.

Figures 5 and 6 illustrate a preferred embodiment of the floor plate. The floor  
 plate includes a cover assembly 34, which comprises a cover 36 hinged to a top plate  
 38. A securing plate 40 is welded to the bottom of the top plate and includes a hole 42

therein for receiving the locking pin 18. A lower cover plate 44 is the lowermost part of the assembly and includes a pan portion 46 for being placed in an opening in the floorboard of the vehicle. A seal 48 made of flexible material such as Neoprene is placed between the top cover assembly and the lower cover plate to prevent  
 5 accumulation of debris in the pan 46 through the hole 38. In turn, the pan 46 seals the assembly from entry of debris from below the assembly.

The cover 36 is attached by hinges 50, which are known in the art, for allowing the cover to be easily opened and to have a full 180° range of motion.

Figure 7 illustrates an embodiment wherein the movable securing element 2 is  
 10 mounted for vertical motion with respect to the vehicle. This is attained by providing a pivotal mounting bracket 14', which is rotated 90° with respect to the bracket 14, and a second bracket 17' also rotated 90° with respect to bracket 17. Thus, a pivot pin 16' is horizontal to provide vertical movement of the movable element 2. A storage position of the movable element is shown in figure 7 in phantom lines. The movable element  
 15 may be held in the storage position in any of several ways, such as by a known strap or latch.

Figures 8a and 8b show yet another embodiment wherein the movable element 2 telescopes. Thus, the bracket 10, includes a fixed horizontal portion 58 that receives a reduced diameter portion 60 of movable element 2 whereby the movable element can be moved between the storage position of figure 8a and the operative position of figure  
 20 8b by sliding the portion 60 with respect to fixed horizontal portion 58. In this embodiment, the movable element 2 is held in the storage position of figure 8a by engagement between the locking pin 18 and a second floor plate 62, which is located inboard of floor plate 20. The movable element 2 is held in the operative position  
 25 shown in figure 8b by engagement between the locking pin 18 and the recess and floor plate 20.

In operation, the system of the invention greatly facilitates transportation of passengers in wheelchairs. A significant advantage of the invention is that the time required for securing or releasing a wheelchair is greatly reduced from prior systems.

Further, because the straps are permanently attached, they will be readily available for use, which obviates the driver's searching for loose straps, as in the prior art systems. The straps are also clean and in good repair because they are retained in the housings when not in use. Still further, the invention allows the wheelchair area to be used by other passengers when the seats 6 are placed in their operational positions (not illustrated). Of course, the area designated for wheelchairs may be used exclusively for wheelchairs. The securing elements are shown in figures 1 and 2 in the configuration wherein the wheelchairs are placed in tandem, with both facing forward. It is also possible for the securing elements to be placed such that the wheelchairs are facing each other, or more preferably, arranged with a single wheelchair facing forward on each side of the vehicle. In this latter case, each arrangement would be very much like that for the rear wheelchair in figures 1 and 2. In the case of a single wheelchair station, however, the brackets on the movable element for the housings would have the configurations shown in figure 4.

The wheelchairs are easily attached to the securing elements by pivoting the movable elements to positions that will allow the wheelchairs to be rolled into the desired positions. Guide bars 54 are placed along the side walls to assist in positioning the wheelchairs in a direction transverse to the bus. Then, the operator places the movable elements in the positions shown in figures 1 and 2 and attaches the wheelchair restraining straps and the passenger safety belts. In the configuration shown in figures 1 and 2 shoulder belts 52 are used as well as lap belts to ensure safety.

Modifications within the scope of the appended claims will be apparent to those of skill in the art.



We Claim:

1. In combination, a vehicle having

a floor for supporting passengers,

a side wall extending upward from said floor,

5 a passenger seat adjacent said side wall, and

means for securing a wheelchair to said vehicle,

wherein said passenger seat is foldable from a seating position occupying an area above said floor to a folded position that allows said wheelchair to be positioned in said area, and

10 said means for securing a wheelchair is fixed to said vehicle and comprises means for engaging said wheelchair and is movable between an operative position extending into said area for receiving said wheel chair and a second position remote from said area.

2. A combination according to claim 1 wherein said means for securing is pivotally mounted to said vehicle for movement between said operative and second positions.

3. A combination according to claim 2 wherein said means for securing comprises an elongate bar having a pivotal connection at an end adjacent said side wall and latch means for holding said securing element in said operative position when said latch is engaged and for allowing said securing element to be moved to said second position  
20 when said latch means is disengaged.

4. A combination according to claim 3 wherein said latch means comprises a vertically movable pin and a recess for receiving said pin.

5. A combination according to claim 4 wherein said recess comprises a securing plate having an opening for receiving said pin, enclosure means beneath said securing plate  
25 forming a cavity for receiving a tip of said pin and for preventing debris from impacting said securing plate and pin from below said plate, and a flexible seal covering said plate

for preventing debris from impacting said securing plate and pin from above said securing plate, and a pivotally mounted cover plate covering said flexible seal.

6. A combination according to claim 1 further comprising second means for securing a wheel chair to a vehicle, wherein said second means for securing is spaced from said means for securing and comprises means for engaging a said wheelchair, whereby said means for engaging on said means for securing are adapted to engage one end of a said wheelchair and said means for engaging on said second means for securing are adapted to engage an opposite end of said wheelchair.

7. A combination according to claim 6 wherein said second means for securing is fixed to said vehicle for continuously extending into said area.

8. In combination,

a vehicle having an area for receiving a wheelchair, and

means for securing a wheelchair in said area to said vehicle, wherein said means for securing is fixed to said vehicle and comprises a movable element having means thereon for engaging a portion of said wheelchair in said area, said movable element being movable with respect to said vehicle between an operating position wherein said means for engaging is located relative to said area to allow said means for engaging to be attached to said portion of said wheelchair and a storage position wherein said means for engaging is located relative to said area to be remote from said portion of said wheelchair.

9. A combination according to claim 8 wherein said means for securing is mounted for rotational motion with respect to said vehicle.

10. A combination according to claim 9 wherein said means for securing is mounted for pivotal motion about a horizontal axis.

11. A combination according to claim 9 where said means for securing is mounted for pivotal motion about a vertical axis.

12. A combination according to claim 8 wherein said means for securing is mounted for linear motion with respect to said vehicle.

13. A combination according to claim 8 wherein said means for engaging comprises a housing attached to said means for securing and a strap adjustably received in said housing.

14. A combination according to claim 13 wherein said means for securing further comprises a stationary element attached to said vehicle in a fixed position with respect to said area.

15. A combination according to claim 14 wherein said stationary element is attached to said movable element and has means for engaging said wheelchair thereon.

16. A combination according to claim 14 wherein said movable element is at one end of said area and said stationary element is at an opposite end of said area.

17. A combination according to claim 16 wherein said area comprises a first area for receiving a first wheelchair and a second area longitudinally aligned with said first area for receiving a second wheelchair, and said movable element is located between said first area and said second area.

18. A combination according to claim 17 wherein said means for securing further comprises a forward movable element having means thereon for engaging a portion of said second wheelchair in said second area, said forward movable element being movable with respect to said vehicle between an operating position wherein said means for engaging is located relative to said second area to allow said means for engaging to be attached to said portion of said second wheelchair and a storage position wherein said means for engaging is located relative to said second area to be remote from said portion of said second wheelchair.

19. A combination according to claim 14 wherein said stationary element comprises a first stationary element attached to said movable element at one end of said area and a second stationary element at an opposite end of said area.

20. A combination according to claim 8 further comprising latch means for holding said movable securing element in said operative position when said latch is engaged and for allowing said movable securing element to be moved to said storage position when said latch means is disengaged.

5 21. A combination according to claim 20 wherein said latch means comprises a vertically movable pin and a recess for receiving said pin.

22. A combination according to claim 21 wherein said recess comprises a securing plate having an opening for receiving said pin, enclosure means beneath said securing plate forming a cavity for receiving a tip of said pin and for preventing debris from  
10 impacting said securing plate and pin from below said plate, and a flexible seal covering said plate for preventing debris from impacting said securing plate and pin from above said securing plate, and a pivotally mounted cover plate covering said flexible seal.

23. Apparatus for securing a wheelchair to a vehicle comprising  
a bar,  
15 an adjustable strap secured to said bar for engaging said wheelchair, and  
means for mounting said bar to a vehicle such that said bar may be moved with respect to said vehicle between an operative position where said strap can be attached to said wheelchair and a storage position where said strap is remote from said wheelchair.

20 24. Apparatus according to claim 23 further comprising means for pivotally attaching said bar to said vehicle.

25 25. A method for attaching a wheelchair to a vehicle comprising:  
providing said vehicle with an area for receiving said wheelchair,  
providing said vehicle with means for securing said wheelchair in said area to said vehicle, wherein said means for securing is fixed to said vehicle and comprises a movable element having means thereon for engaging a portion of said wheelchair in said area, said movable element being movable with respect to said vehicle between

an operating position wherein said means for engaging is located relative to said area to allow said means for engaging to be attached to said portion of said wheelchair and a storage position wherein said means for engaging is located relative to said area to be remote from said portion of said wheelchair,

5 placing said wheelchair in said area,

moving said movable element from said storage position to said operating position, and

attaching said means for securing to said wheelchair.

ABSTRACT

Apparatus for securing one or more wheelchairs to a vehicle includes a plurality of straps for holding the wheelchairs to the vehicle. Some of the straps are attached to a movable element that can be moved into or out of the area to be occupied by the wheelchairs. This allows the area to be utilized by other passengers when no wheelchairs are present and also facilitates ingress and egress of the wheelchairs. In the preferred embodiment, movable elements, which carry housings for wheelchair-engaging belts and passenger restraint belts, are mounted to the side wall of the vehicle for pivotal movement about vertical axes between storage positions and operative positions. The apparatus allows an operator to quickly and easily secure or release a passenger in a wheelchair and maintains the integrity of the straps.

FIG. 1

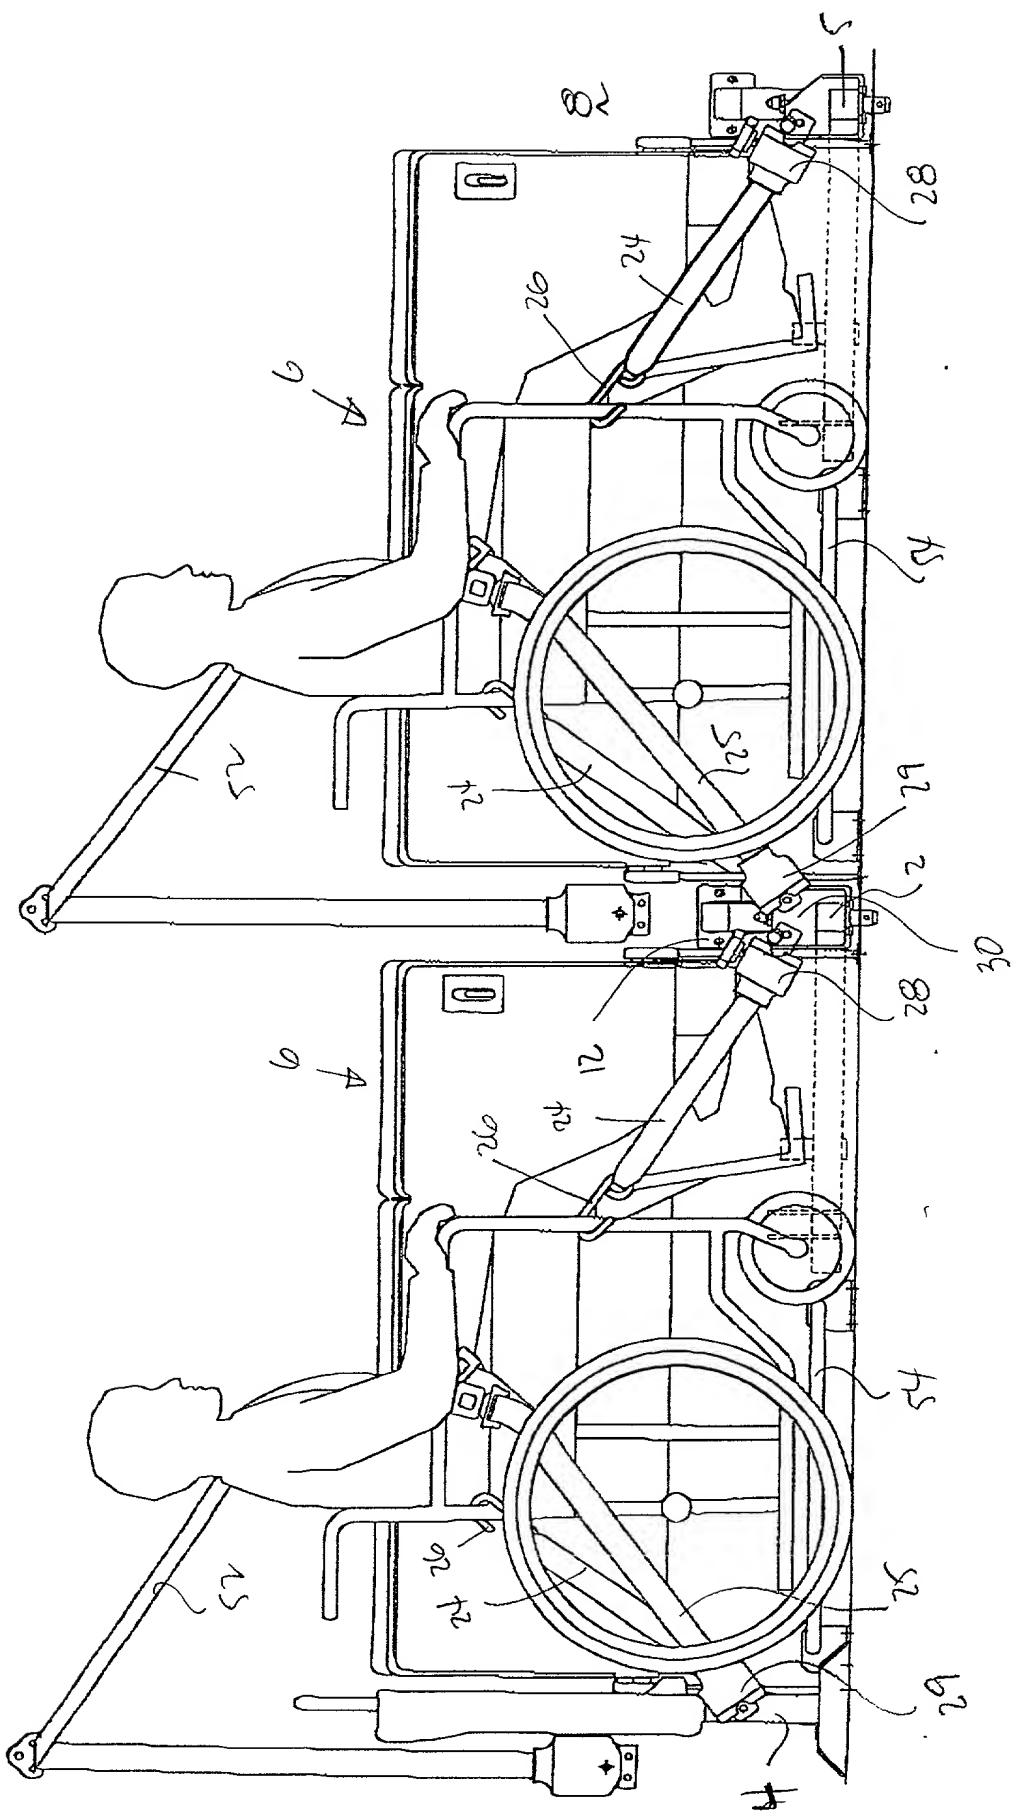


FIG. 2

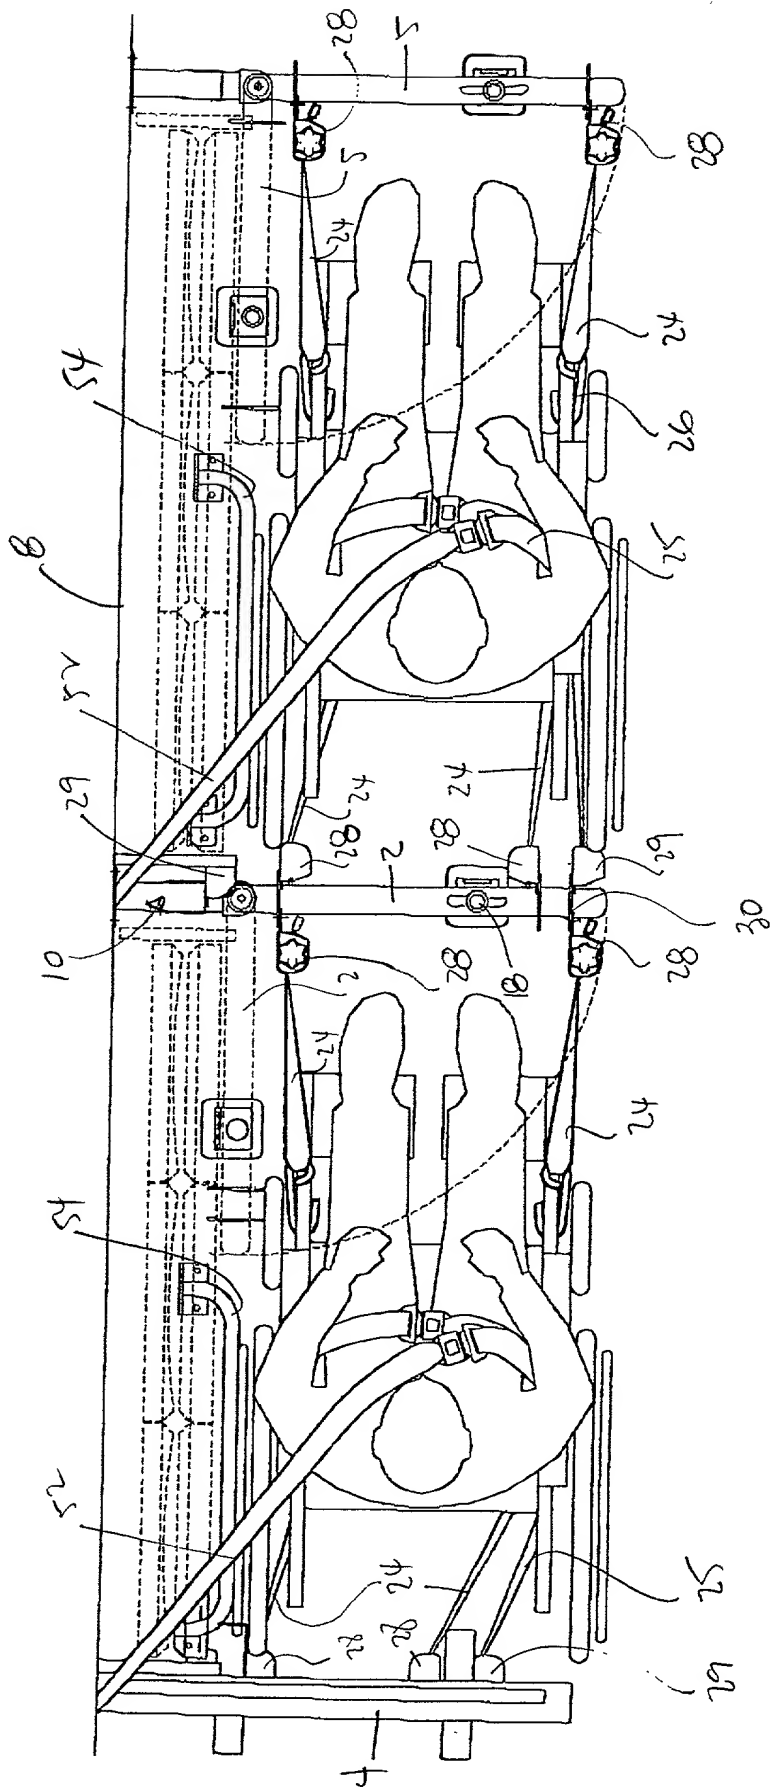






FIG. 5

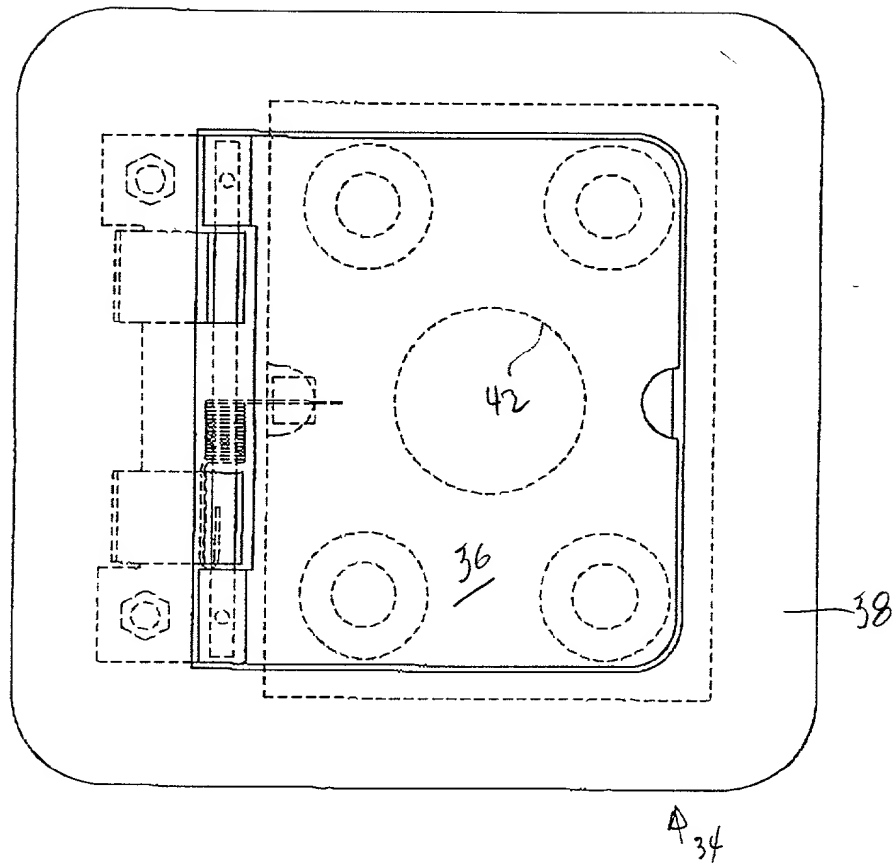


FIG. 6




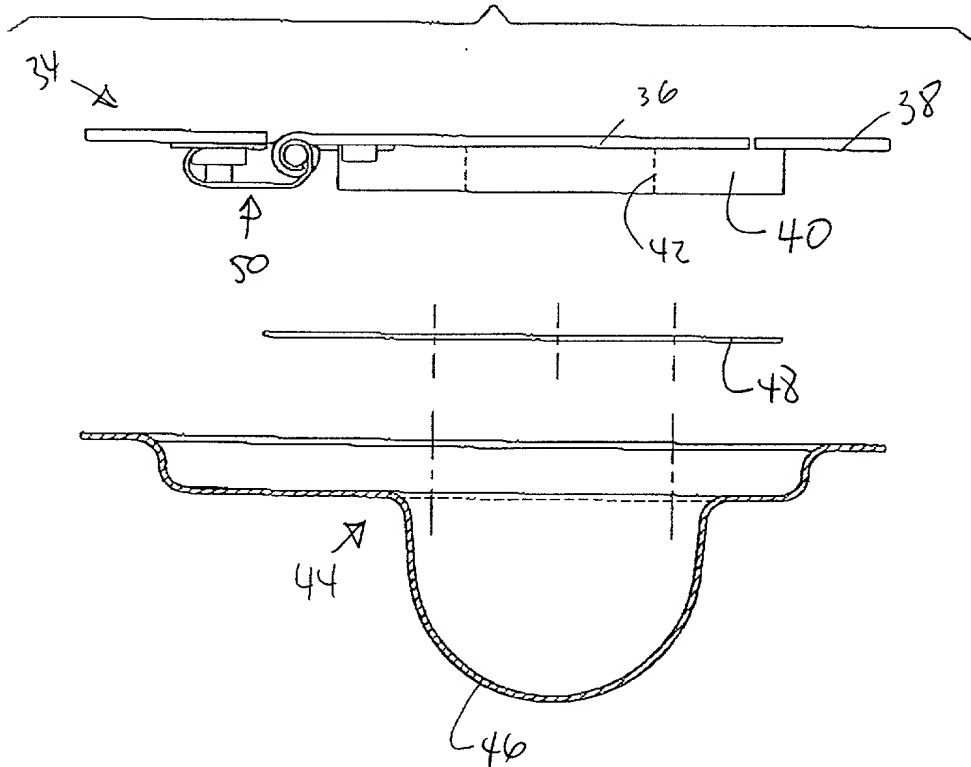


FIG. 4

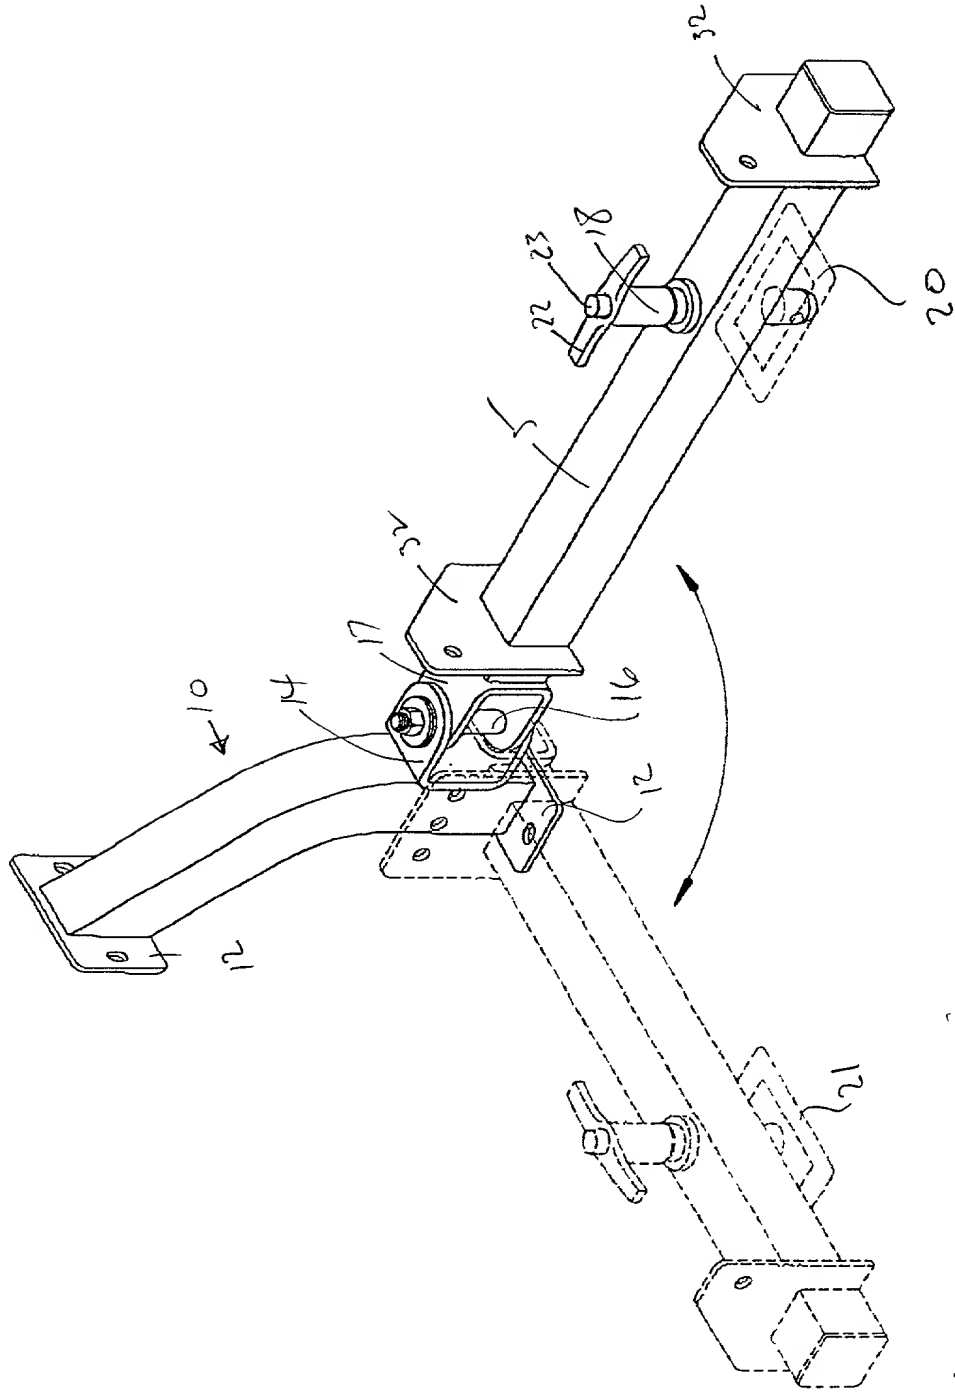

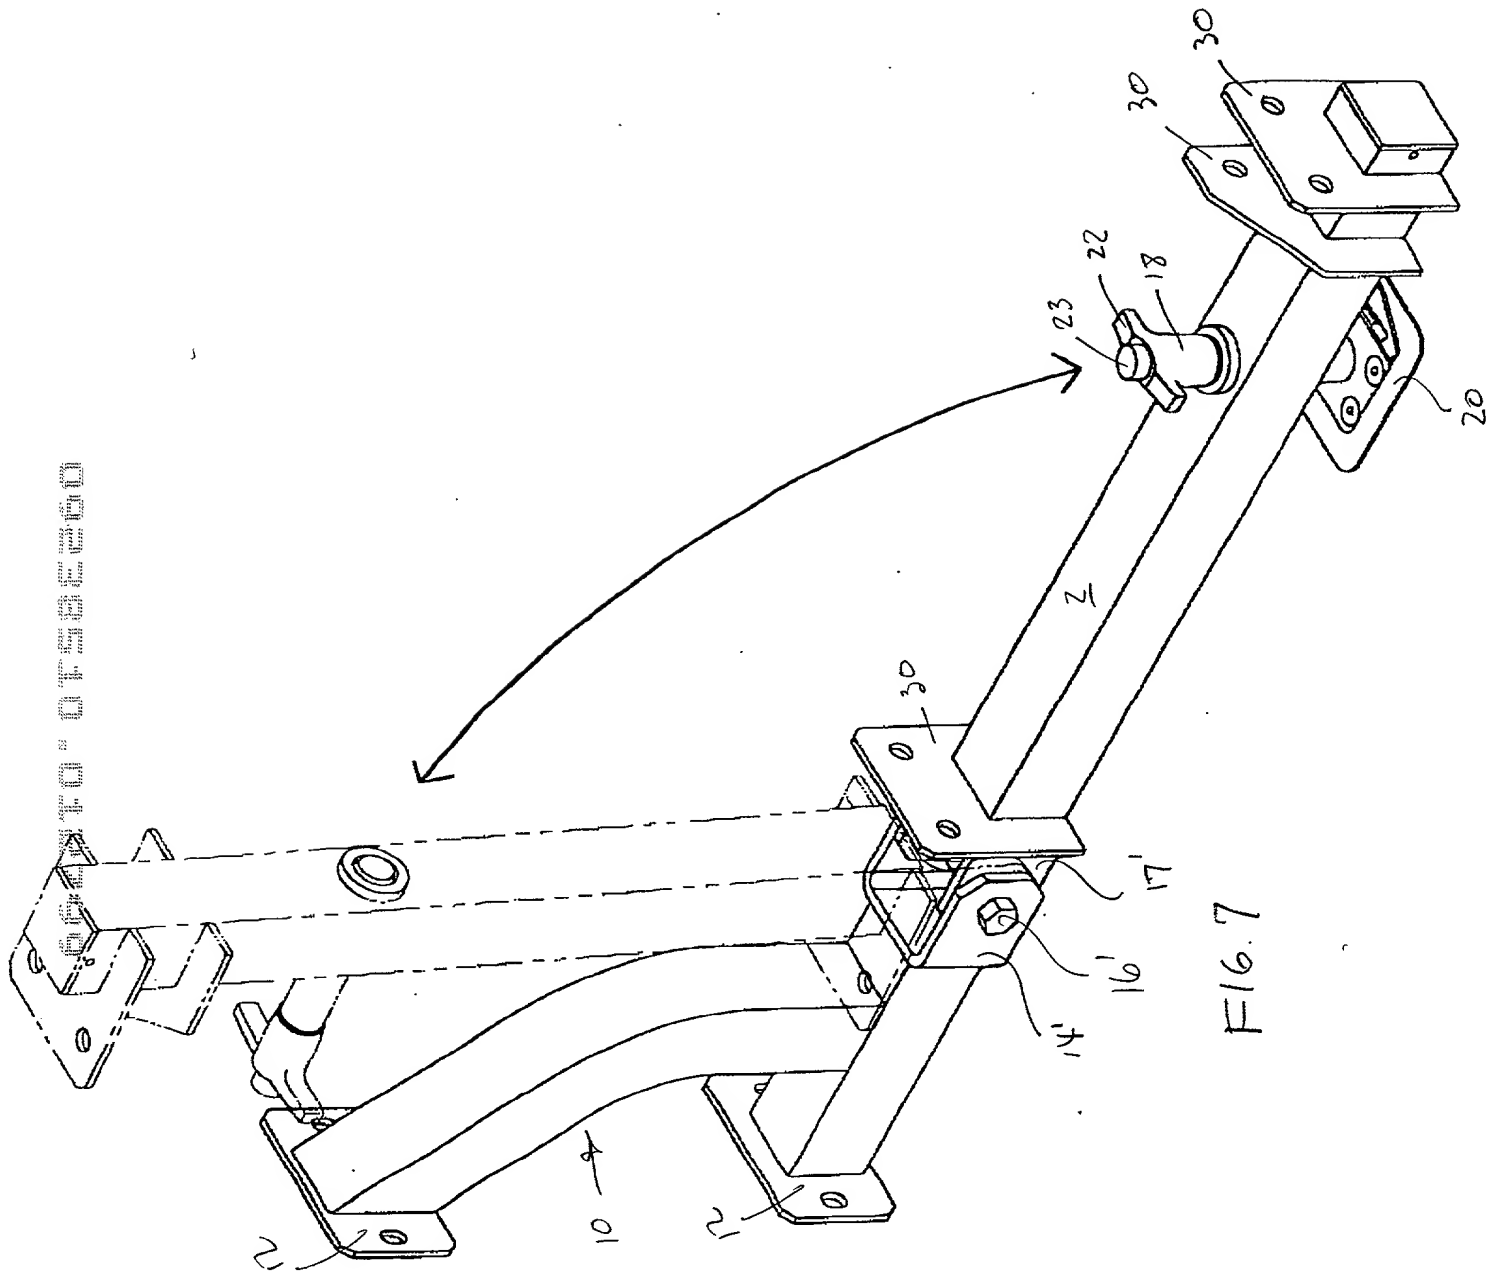

F16.7

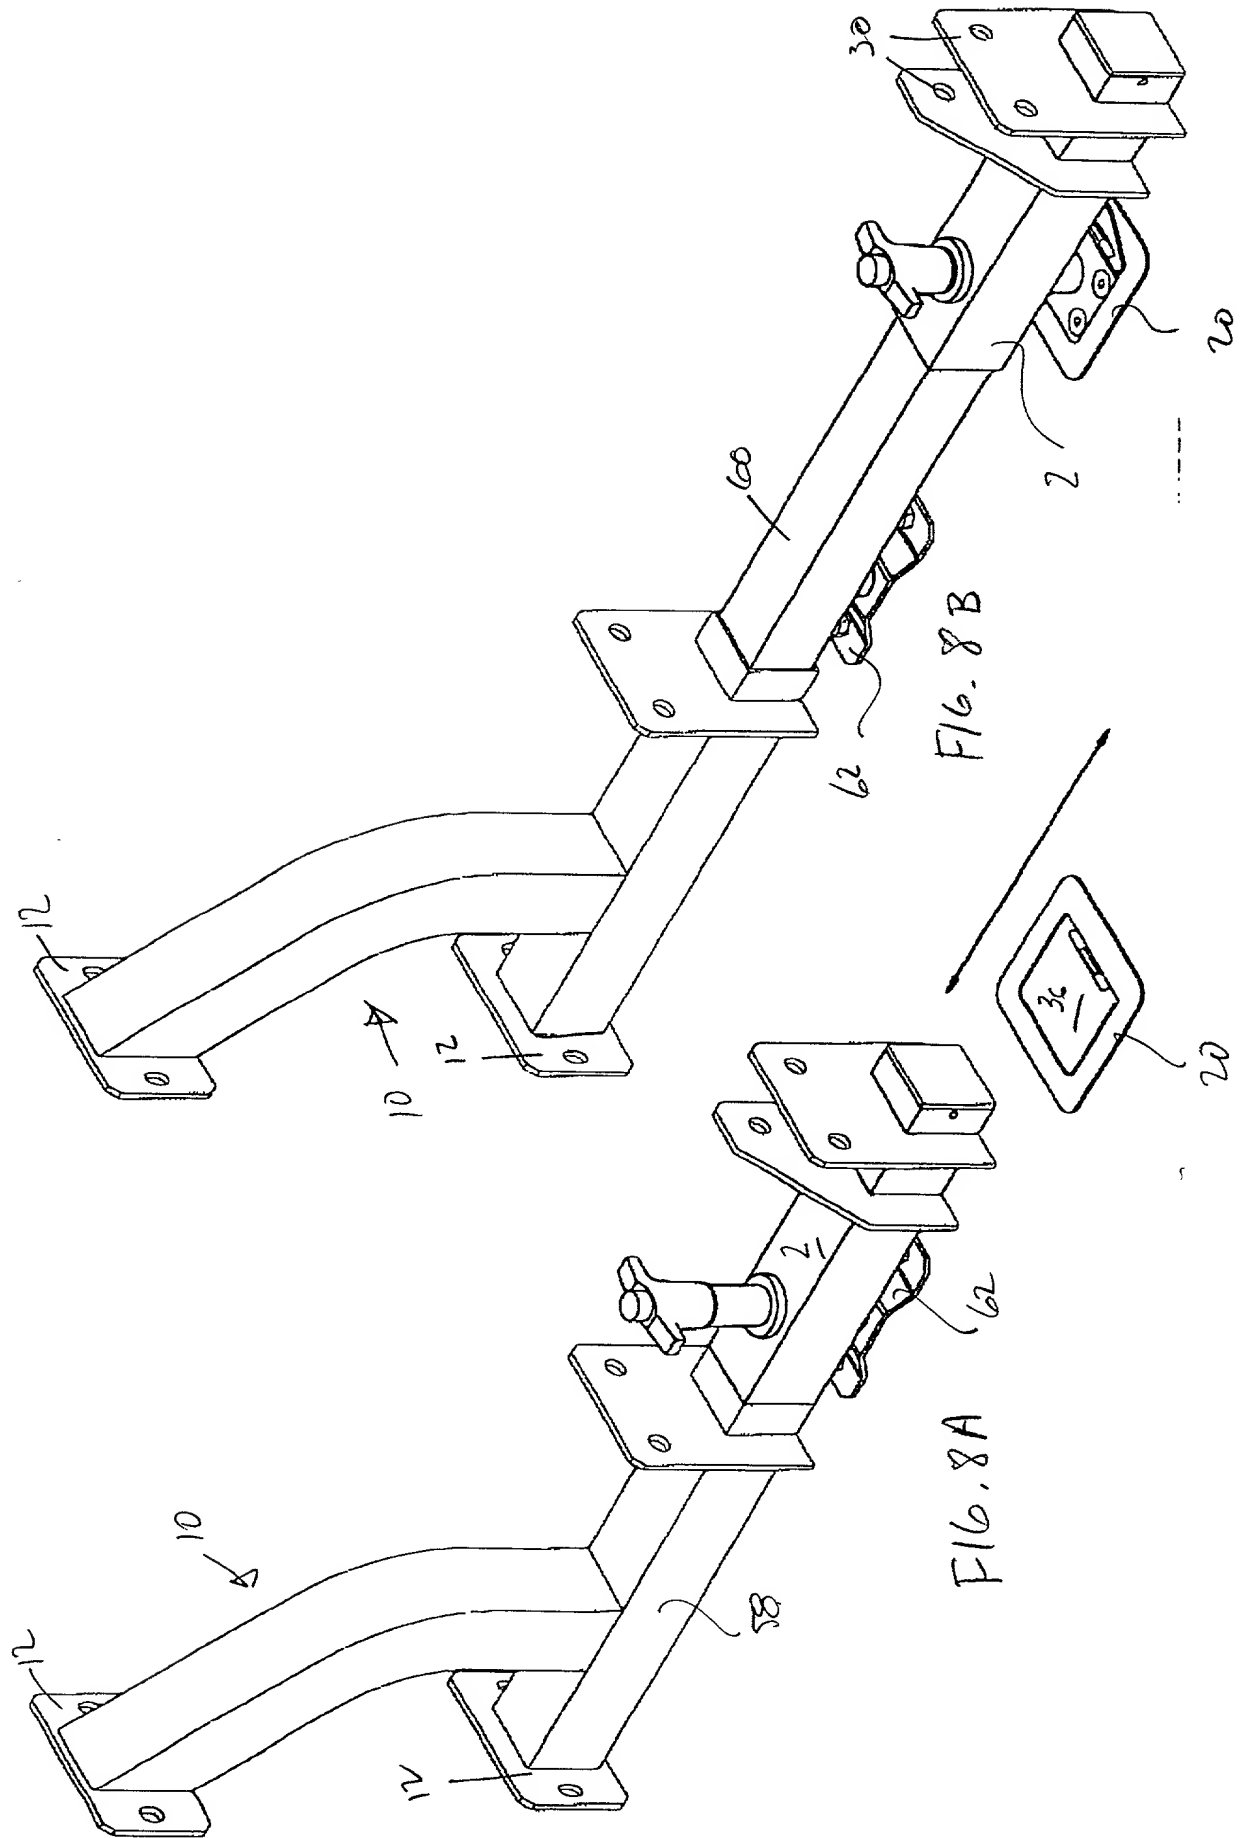

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address, and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled:

## TIE DOWN FOR WHEELCHAIRS

\_\_\_\_\_ the specification of which is attached hereto.

☒ was filed on August 4, 1997, as patent application Serial No. 08/905,352.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware and which is material to the examination of the patent application in accordance with 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designates at least one country other than the United States, listed below and have also identified below, by checking the space, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is not claimed.

## Prior Foreign Application(s)

Number	Country	Day/Month/Year Filed	Priority Not Claimed
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

## Application Serial Number

60/032,195

## Filing Date

12-02-1996

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information known to me which is material to the patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

## Application Serial Number

## Filing Date

## Status (patented, pending, abandoned)

Each undersigned applicant hereby appoints MICHAEL T. PLATT (Registration No. 20,086), CONRAD J. CLARK (Registration No. 30,340) CHRISTOPHER W. BRODY (Registration No. 33,613), J. JOHN SHIMAZAKI (Registration No. 37,236) and SCOTT T. WAKEMAN (Registration No. 37,750) as his attorneys with full power of substitution to prosecute the subject application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence to: DICKINSON, WRIGHT, MOON, VAN DUSEN & FREEMAN, 1901 L Street, N.W., Suite 800, Washington, D.C. 20036, Phone (202) 457-0160.

I hereby declare that all statements made herein of my own knowledge are true and that all statement made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: James A. Ditch

Inventor's signature: James A. Ditch

Date: Aug. 11, 1997

Residence: San Pedro, California

Citizenship: United States

Post Office Address: 2230 Bardale Avenue, San Pedro, CA 90731

Full name of second joint inventor, if any: Frereidoun Razavi

Inventor's signature: Frereidoun Razavi

Date: NOV. 11, 1997

Residence: Sun Valley, California

Citizenship: UNITED STATES

Post Office Address: 8711 Tamarach Avenue, Sun Valley, CA 91352

Full name of third joint inventor, if any: Richard C. Magnuson

Inventor's signature: \_\_\_\_\_

Date: \_\_\_\_\_

Residence: Kentwood, Michigan

Citizenship: United States

Post Office Address: 401 American Seating Center, Grand Rapids, MI 49504-4499

Fourth and subsequent joint inventors are listed on second sheet

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address, and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled:

## TIE DOWN FOR WHEELCHAIRS

\_\_\_\_\_ the specification of which is attached hereto.

☒ was filed on August 4, 1997, as patent application Serial No. 08/905,352.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware and which is material to the examination of the patent application in accordance with 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designates at least one country other than the United States, listed below and have also identified below, by checking the space, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is not claimed.

## Prior Foreign Application(s)

Number	Country	Day/Month/Year Filed	Priority Not Claimed
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

Application Serial Number  
60/032,195

Filing Date  
12-02-1996

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information known to me which is material to the patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application Serial Number

Filing Date

Status (patented, pending, abandoned)

Each undersigned applicant hereby appoints MICHAEL T. PLATT (Registration No. 20,086), CONRAD J. CLARK (Registration No. 30,340) CHRISTOPHER W. BRODY (Registration No. 33,613), J. JOHN SHIMAZAKI (Registration No. 37,236) and SCOTT T. WAKEMAN (Registration No. 37,750) as his attorneys with full power of substitution to prosecute the subject application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence to: DICKINSON, WRIGHT, MOON, VAN DUSEN & FREEMAN, 1901 L Street, N.W., Suite 800, Washington, D.C. 20036, Phone (202) 457-0160.

I hereby declare that all statements made herein of my own knowledge are true and that all statement made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: James A. Ditch

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: San Pedro, California

Citizenship: United States

Post Office Address: 2230 Bardale Avenue, San Pedro, CA 90731

Full name of second joint inventor, if any: Frereidoun Razavi

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: Sun Valley, California

Citizenship: \_\_\_\_\_

Post Office Address: 8711 Tamarach Avenue, Sun Valley, CA 91352

Full name of third joint inventor, if any: Richard C. Magnuson

Inventor's signature *Richard C. Magnuson* Date 11-11-97

Residence: Kentwood, Michigan

Citizenship: United States

Post Office Address: 401 American Seating Center, Grand Rapids, MI 49504-4499

Fourth and subsequent joint inventors are listed on second sheet